


P
49/50

BTTZ防火电缆用氧化镁粉
MgO POWDR FOR BITZ Fire-proof Electric Cable

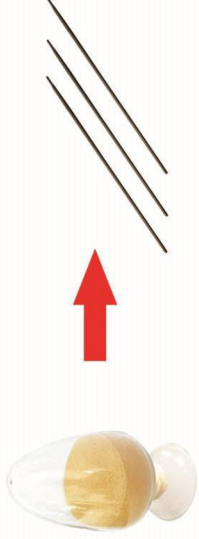

电焊条氧化镁粉

TE-HTC

● **化学成分 (%)**

名称	MgO	CaO	Fe ₂ O ₃	SiO ₂	Al ₂ O ₃	LOI	S	P
标准值	≥96	≤2.0	≤0.5	≤2.0	≤0.5	≤0.5	≤0.03	≤0.03

● **物理指标**

目数	粒度分布 (%)							
	+40	+60	+80	+140	+200	+325	-325	-425
筛孔尺寸 (mm)	0.425	0.25	0.18	0.106	0.075	0.045	-0.045	-0.045
标准值	0	≤1.0	20±10	20±10	20±10	15±10	30±10	30±10

● **包装**

25KG编织袋或1000KG吨袋包装, 也可根据客户要求包装。

● **使用及存放说明**

- ① TE-HTC是一款电焊条用氧化镁粉。
- ② TE-HTC不具有防水性能。
- ③ 氧化镁粉尘是易燃物质, 但不会有一氧化碳, 建议在使用的時候, 操作工人佩戴口罩和手套。
- ④ 在运输和贮存过程中应贮存于无腐蚀性气体、清洁、干燥、通风、阳光不能直射, 且不受雷击的位置。

TOPE INTL CO., LIMITED

MgO POWDR FOR ELECTRODE

TE-HTC

● **Chemical Analysis (%)**

Name	MgO	CaO	Fe ₂ O ₃	SiO ₂	Al ₂ O ₃	LOI	S	P
value	≥96	≤2.0	≤0.5	≤2.0	≤0.5	≤0.5	≤0.03	≤0.03

● **Physical Analysis**

Sieve size(mesh)	Sieve Analysis (%)							
	+40	+60	+80	+140	+200	+325	-325	-425
Sieve size(mm)	0.425	0.25	0.18	0.106	0.075	0.045	-0.045	-0.045
value	0	≤1.0	20±10	20±10	20±10	15±10	30±10	30±10

● **Packing**

25KGs in a woven bag or 1000KG holds a tonnage bag. Special Packing is available on requirement

● **Remarks**

- ① Mainly used for electrode.
- ② TE-HTC does not have waterproof properties
- ③ Magnesium Oxide is non-toxic but with some dust. Anti-dust respirator and gloves are proposed to use during poeration.
- ④ In the course of transportation and storage, it should be stored in my position where there is no corrosive gas, clean, dry, ventilated, sunlight can not shine directly and should not be affected by rain and snow.

记录: _____
